


# solar**edge**

By **SIAM SOLAR CELL**  
THAILAND

## SolarEdge Control and Communication Gateway

SE1000-CCG-G

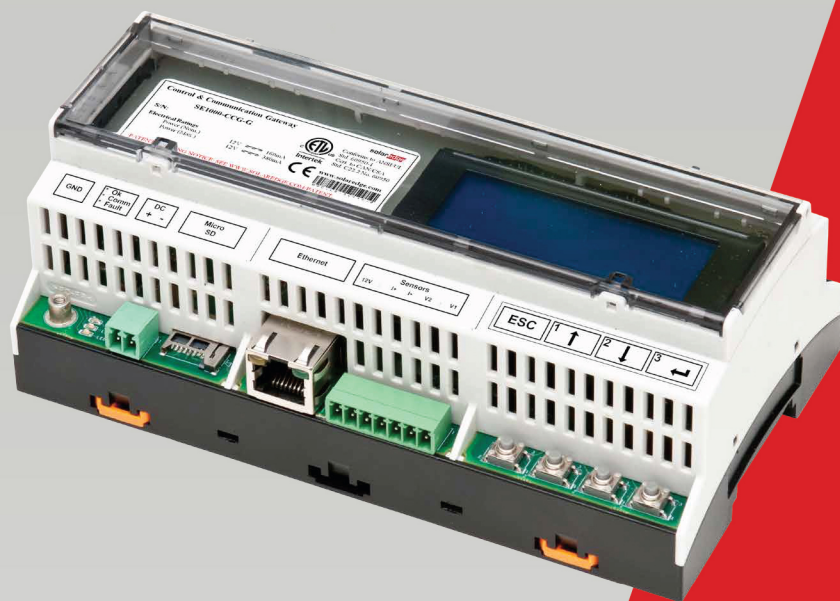

COMMUNICATION

### All-in-one communication gateway

- Wireless connections
- Environmental sensors support
- Power reduction interface
- Electricity meter reader
- Non-SolarEdge inverter data loggers
- Easy installation - DIN rail and wall mount

POWER				
Power Supply - Wall Mount	Included, 100-240VAC, EU/UK/US/AU interchangeable, 2-pin plug			
Supply Voltage	9-14			Vdc
Connector Type	terminal block			
Power Consumption	<2			W
ANALOG SENSOR INPUT				
Number of Inputs	3			
	Range	Accuracy	Resolution	
Input 1	0-30mV or 0-2V	+/- 1% f.s	10 bit	
Input 2	0-2V or 0-10V			
Input 3	-20mA – 20mA			
COMMUNICATION INTERFACES				
Ethernet Interface	10/100-BaseT			
Wireless Connections	ZigBee module (*)			
Power Reduction Interface	4 control pins, 5V, GND			
RS232 Interface	For local connection			
SUPPORTED RS485 DEVICES (a)				
SolarEdge Devices	Yes			
Export Inverter Data	Yes			
Revenue meters	Yes			
Export Data to Non-SolarEdge Logger	Yes			
ENVIRONMENTAL				
Operating Temperatures	-20 to 60 / -4 to 140			°C / °F
Protection Rating	IP20 Indoor			
MECHANICAL				
Mounting Type	DIN Rail / Wall mount			
Dimensions (LxWxH)	161.6 X 90 X 62 / 6.36 x 3.54 x 2.44			mm / Inch
Weight	0.5 / 1.1			kg / lbs
STANDARD COMPLIANCE				
Safety	UL60950-1, IEC-60950-1			
EMC	FCC Part 15 class B, IEC61000-6-2, IEC61000-6-3			


(a) for supported protocols and devices, see link <http://www.solaredge.com/files/pdfs/se-gateway-supported-devices.pdf>

(\*) sold separately - see individual product specs for supported locations

### CONNECTION SCENARIOS


#### Example 1

Extend the Distance of Wired Connection

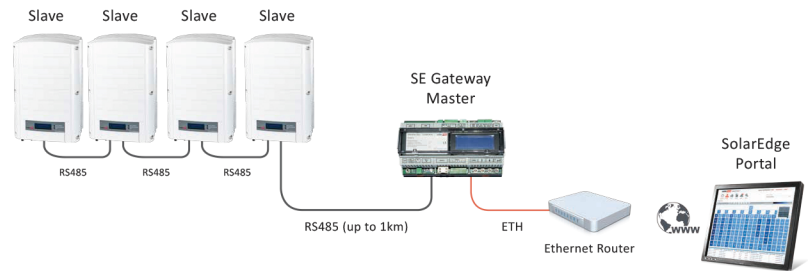


#### Example 2

Non-SolarEdge Logger & SolarEdge Monitoring  
Parallel Connection

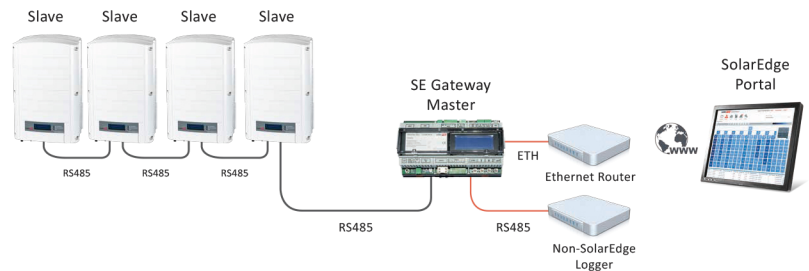

#### Example 3


ZigBee Wireless Server Connection

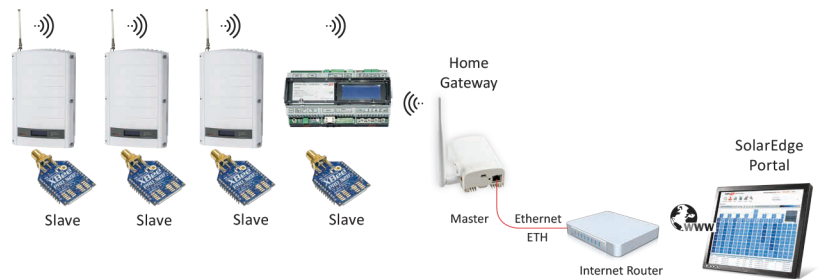

## CONNECTION SCENARIOS


### Example 4

#### Power Reduction Interface (PRI) Connection

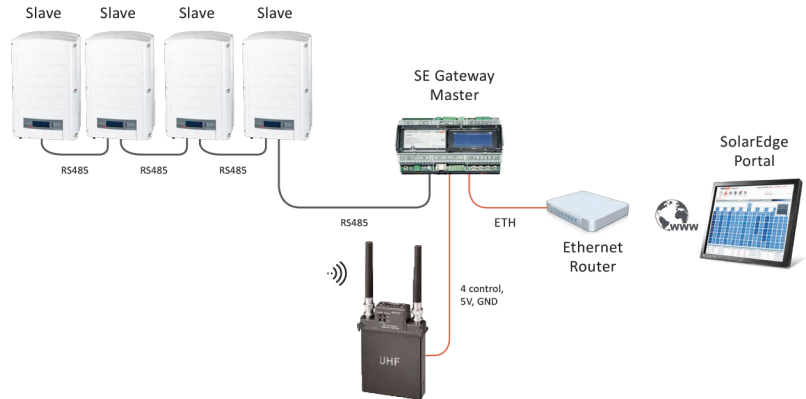

### Example 5

#### Analog Sensors Connection

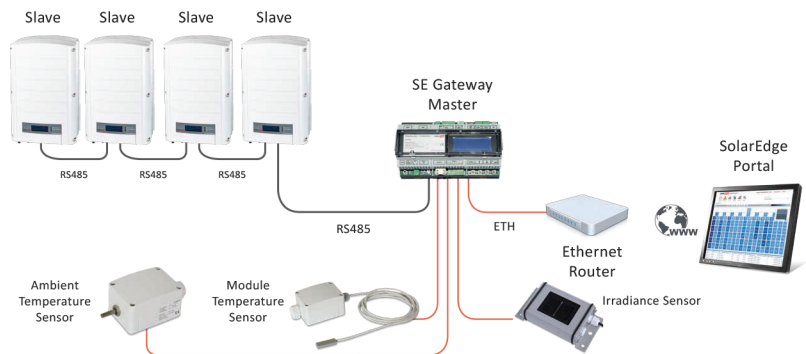

### Example 6

#### Electricity Connection

